


OPTH POWER TAKE-OFF GENERATORS



TECHNICAL SPECIFICATIONS

MODEL	KW	RPM	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	APPROX. WEIGHT/LBS.
OPTH5-25	5	2,500	16.50	1.00	0.250 x 0.125	2.25	NA	7.44	NA	NA	6.59	NA	3.63	8.25	10.75	16.00	0.53	4.25	4.25	10.50	0.25	9.00	OMIT	OMIT	OMIT	170
OPTH10-25	10	2,500	19.88	1.25	0.250 x 0.125	3.50	7.06	5.50	7	0.75	6.75	2.00	4.50	10.13	12.00	15.56	0.56	4.25	4.25	8.50	0.25	7.25	OMIT	OMIT	OMIT	175
OPTH15-18	15	1,800	24.38	1.63	0.375 x 0.1875	4.00	8.81	8.50	10	0.75	8.00	2.50	5.50	12.75	14.00	18.19	0.56	4.25	4.25	10.50	0.25	9.00	3.25	3.50	SLOT	290
OPTH20-18	20	1,800	26.38	1.63	0.375 x 0.1875	4.00	8.81	8.50	10	0.75	8.00	2.50	5.50	12.75	14.00	18.19	0.56	4.50	6.50	10.50	0.25	9.00	3.25	3.50	SLOT	345
OPTH25-18	25	1,800	28.38	1.88	0.50 x 0.25	4.00	8.81	8.50	10	0.75	8.00	2.50	5.50	12.75	14.00	18.19	0.56	4.50	6.50	10.50	0.25	9.00	3.25	3.50	SLOT	410
OPTH33-18	33	1,800	31.69	2.00	0.50 x 0.25	5.00	10.75	11.00	13	1.00	8.50	3.00	6.50	14.75	15.75	20.50	0.69	4.50	6.50	12.50	0.38	11*	3.25	3.50	SLOT	570

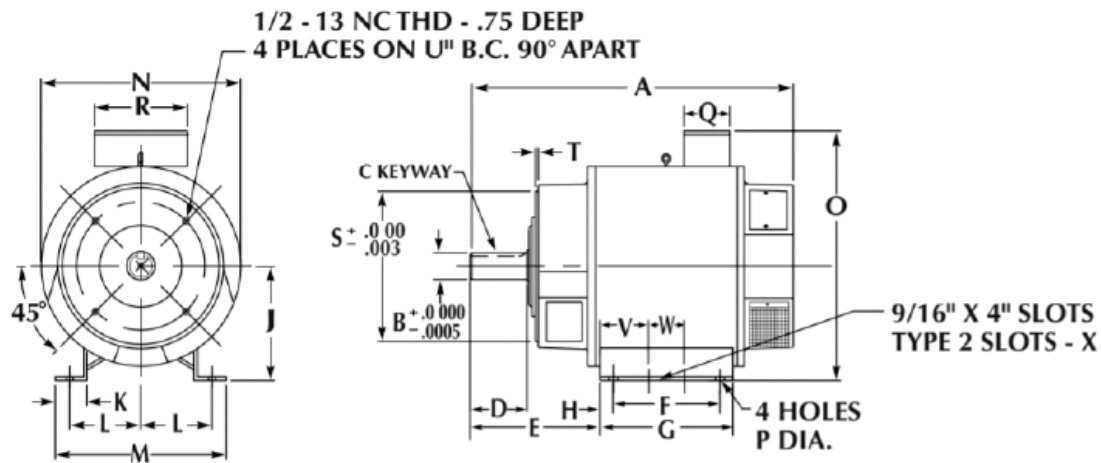

OHIO MAGNETICS, INC.
 5400 DUNHAM RD | MAPLE HEIGHTS, OH | 44317-3687
 TEL: (216) 662-8484 | sales@ohiomagnetics.com
 © 2022 OHIO MAGNETICS, INC.

Made in U.S.A.