


STEARNS ELECTROMAGNETIC DRUMS LD-RADIAL DESIGN



TECHNICAL SPECIFICATIONS


SIZE	WATTS	APPROX. SHIP WT. (LBS.)	DIMENSIONS (INCHES)											DRUM SPEED (RPM)	
			A	B	C	E	F	G	J	K	L	M	Q	FEED	
														UNDER	OVER
3036	1800	4400	33.00	30	35.25	54.75	66.75	3.50	4.50	11.00	3.50	1.25	0.75	35	30
3048	1825	5000	33.00	30	47.25	66.75	78.75	3.50	4.50	11.00	3.50	1.25	0.75	35	30
3060	2970	7100	33.00	30	59.25	78.75	90.75	3.50	4.50	11.00	3.50	1.25	0.75	35	30
3636	3200	4000	41.50	36	35.50	52.50	61.50	3.50	5.50	15.00	4.50	1.25	1.00	35	25
3642	3400	4520	41.50	36	41.50	58.50	67.50	3.50	5.50	15.00	4.50	1.25	1.00	35	25
3648	3800	5200	41.50	36	47.50	64.50	73.50	3.50	5.50	15.00	4.50	1.25	1.00	35	25
3654	4100	5800	41.50	36	53.50	70.50	79.50	3.50	5.50	15.00	4.50	1.25	1.00	35	25
3660	4400	6300	41.50	36	59.50	76.50	85.50	3.50	5.50	15.00	4.50	1.25	1.00	35	25
3672	5200	7600	41.50	36	71.50	88.50	97.50	3.50	5.50	15.00	4.50	1.25	1.00	35	25
4248	4600	6600	46.75	42	47.50	69.50	80.00	4.00	6.00	16.00	5.00	1.50	1.25	35	25
4254	5000	7300	46.75	42	53.50	75.50	86.00	4.00	6.00	16.00	5.00	1.50	1.25	35	25
4260	5400	8200	46.75	42	59.50	81.50	92.00	4.00	6.00	16.00	5.00	1.50	1.25	35	25
4272	6400	10000	46.75	42	71.50	93.50	104.00	4.00	6.00	16.00	5.00	1.50	1.25	35	25

Table continued on next page

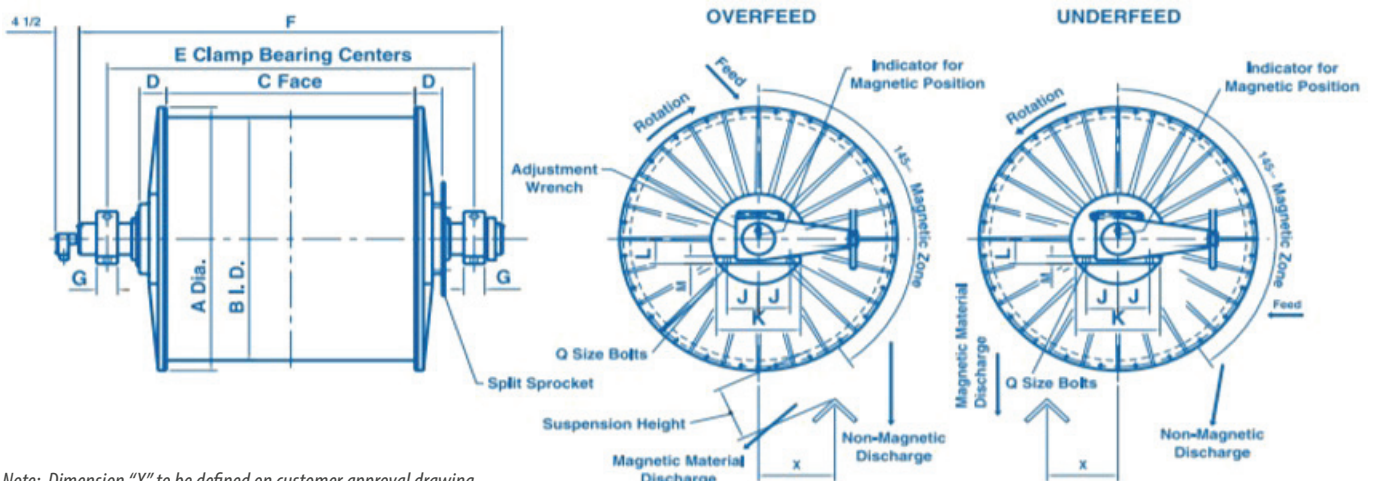

Note: Dimension "X" to be defined on customer approval drawing.

SIZE	WATTS	APPROX. SHIP WT. (LBS.)	DIMENSIONS (INCHES)											DRUM SPEED (RPM)	
			A	B	C	E	F	G	J	K	L	M	Q	FEED	
														UNDER	OVER
4848	5500	9300	52.75	48	47.50	69.50	80.00	4.00	6.00	16.00	5.00	1.50	1.25	30	23
4854	5800	9200	52.75	48	53.50	75.50	86.00	4.00	6.00	16.00	5.00	1.50	1.25	30	23
4860	6300	10500	52.75	48	59.50	81.50	92.00	4.00	6.00	16.00	5.00	1.50	1.25	30	23
4872	7300	13000	52.75	48	71.50	93.50	104.00	4.00	6.00	16.00	5.00	1.50	1.25	30	23
4884	7500	14000	52.75	48	84.00	106.00	116.00	4.00	6.00	16.00	5.00	1.50	1.25	30	23
4896	9100	15000	52.75	48	96.00	118.00	128.00	4.00	6.00	16.00	5.00	1.50	1.25	30	23
5454	6900	10500	58.75	54	53.50	75.50	86.00	4.00	7.50	19.00	6.00	2.00	1.25	30	22
5460	7400	11500	58.75	54	59.50	81.50	92.00	4.00	7.50	19.00	6.00	2.00	1.25	30	22
5472	8500	16500	58.75	54	71.50	93.50	104.00	4.00	7.50	19.00	6.00	2.00	1.25	30	22
5484	8200	17000	58.75	54	83.50	104.00	117.00	4.00	7.50	19.00	6.00	2.00	1.25	30	22
5496	8200	17700	58.75	54	95.50	116.00	129.00	4.00	7.50	19.00	6.00	2.00	1.25	30	22
6060	8700	18000	64.75	60	59.50	81.50	92.00	4.00	7.50	19.00	6.00	2.00	1.25	30	21
6072	9500	19600	64.75	60	71.50	93.50	104.00	4.00	7.50	19.00	6.00	2.00	1.25	30	21
6084	9700	25000	64.75	60	83.50	104.00	116.00	4.00	7.50	19.00	6.00	2.00	1.25	30	21

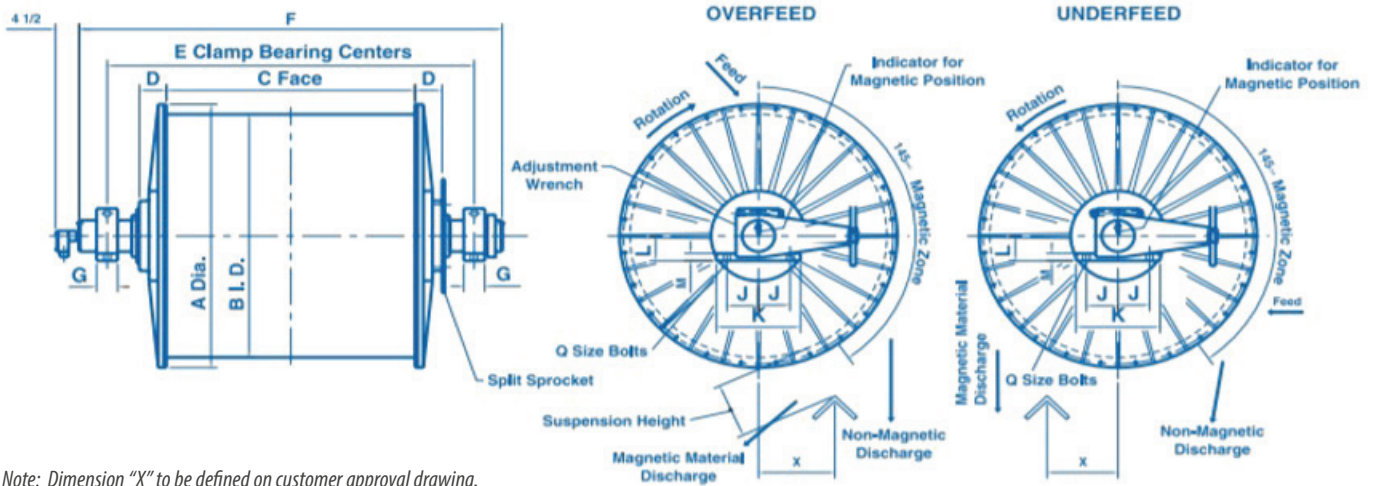

Note: Dimension "X" to be defined on customer approval drawing.

OHIO MAGNETICS, INC.
 5400 DUNHAM RD | MAPLE HEIGHTS, OH | 44317-3687
 TEL: (216) 662-8484 | sales@ohiomagnetics.com
 © 2022 OHIO MAGNETICS, INC.

Made in U.S.A. 



www.ohiomagnetics.com

A WORLD LEADER IN LIFTING MAGNET SYSTEMS AND MAGNETIC SEPARATION EQUIPMENT