


STEARNS ELECTROMAGNETIC SUSPENDED MAGNET




TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (INCHES)				STANDARD VOLTS DC	APPROX. WATTS	APPROX. WT. (LBS.)
	A	B	C	D			
25A	25	34	22.1250	45.00	115	2,320	2,000
30A	30	34	23.3750	47.50	115	2,750	2,560
36A	36	38	18.5625	50.75	115	4,290	2,600
38A	38	43	25.4375	55.50	115	4,120	4,430
43A	43	48	26.3125	60.00	115	5,060	5,680
48/54M	48	54	26.0000	64.25	115	6,200	6,500
48A	48	54	28.0625	65.75	115	6,200	7,740
54A	54	60	29.5000	71.50	230	7,560	10,580
61A	61	68	30.7500	77.25	230	9,260	13,930
68A	68	77	32.7500	85.00	230	11,200	19,000
72A	72	78	47.0000	105.00	230	13,900	26,000
80A	80	86	41.2500	103.00	230	15,930	29,000
90A	90	90	45.0000	104.00	230	20,000	37,000
100A	100	110	49.7500	107.00	230	23,400	48,500

RECTANGULAR ELECTRO SUSPENDED MAGNET IN-LINE POSITION

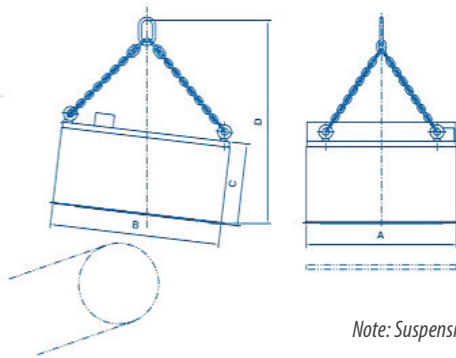

RECTANGULAR ELECTRO SUSPENDED CROSS-BELT POSITION

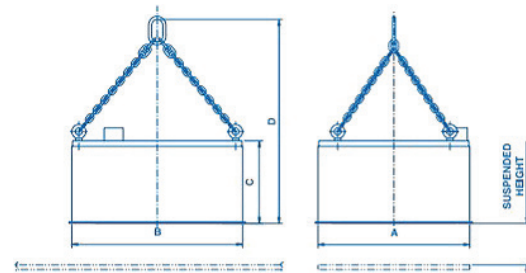

Note: Suspension height to be defined on customer approval drawing.

OHIO MAGNETICS, INC.
 5400 DUNHAM RD | MAPLE HEIGHTS, OH | 44317-3687
 TEL: (216) 662-8484 | sales@ohiomagnetics.com
 © 2022 OHIO MAGNETICS, INC.

Made in U.S.A.



www.ohiomagnetics.com

A WORLD LEADER IN LIFTING MAGNET SYSTEMS AND MAGNETIC SEPARATION EQUIPMENT